


MODEL NUMBER:  
NC-S1-24 and NC-S1-12

S<sup>1</sup> Split System AC  
24V | 12V

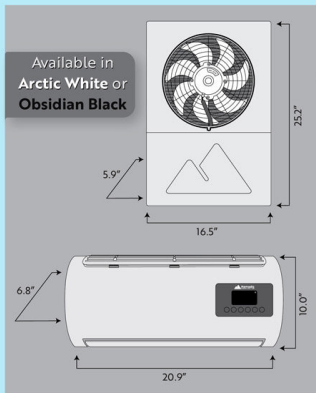

S <sup>1</sup> MODEL	24V	12V
Rated Voltage	24V	12V
Current (Range)	tbd	60-80A
Current ECO Mode	18A	35A
Current MAX Mode	28A (tbd)	55A (tbd)
Fuse Size	50A	60A
Rated Power	1,120W	960W
Air Volume (m <sup>3</sup> /h)	600m <sup>3</sup> /h	600m <sup>3</sup> /h
Rated Cooling Capacity	11,280 BTU	9,600 BTU
Under Voltage Protection	tbd	9-11.2
Under Wattage Recovery	tbd	12.5
Refrigerant	R134a @ 600	
Refrigerant Oil	POE68	
Rotating Speed Range	1,600 - 3,800 RPM	
Weight	48 lb (ext.) + 12 lb (int.)	
Exterior Unit Size	25.2" x 16.5" x 5.9"	
Interior Unit Size	20.9" x 10" x 6.8"	
Noise (Decibels)	≤60 dBA	
Mix-Max Temp Settings	54° to 89°F	
Power Cord Specs (AWG)	10 (≤6.5'), 16 (≤16'), 25 (>16')	
Warranty	One (1) Year	

Due to ongoing improvements, Nomadic Cooling reserves the right to update these specifications without notice.

### S<sup>1</sup> KEY FEATURES

- Stainless steel hardware
- Spring bushing-mounted compressor
- Powder-coated components
- Easy to install and remove



An all-new, crisp LCD interior Control Panel



Remote Control puts Auto/ECO/Powerful/Fan operational modes at your fingertips!



Additional documentation available at [www.NomadicCooling.com](http://www.NomadicCooling.com)

**GO FURTHER  
IN COMFORT** >>>